


VS-09-ST-DSUB-HD-EG

Order No.: 1655111

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655111>

D-SUB contact insert, shell size 1, with 15 signal contacts, contact type pin, with solder cup, straight, fixing with a 3 mm hole, for panel mounting frame VS-09-...

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 046356 029056 |
| sales group | D501 |
| Pack | 10 pcs. |
| Customs tariff | 85366990 |
| Catalog page information | Page 319 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
06/09/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

| | |
|-----------------------------|----------------------|
| Number of positions | 15 |
| Insertion/withdrawal cycles | ≥ 200 |
| Type of connection | Solder cup |
| Conductor cross-section | 0.34 mm ² |

| | |
|------------------------------------|-------------------|
| Connection cross-section AWG | 22 |
| Insertion force per signal contact | ≤ 3.40 N |
| Ambient temperature (operation) | -55 °C ... 125 °C |

Material data

| | |
|------------------------------------|------------------------------|
| Inflammability class acc. to UL 94 | V0 |
| Housing material | Steel, yellow chromated |
| Contact carrier material | Polyester GF |
| Contact material | Copper alloy |
| Contact surface material | Hard gold-plated over nickel |


Electrical characteristics

| | |
|-----------------------|------|
| Rated voltage (III/3) | 60 V |
| Rated surge voltage | 1 kV |
| Rated current | 3 A |

Diagrams/Drawings

Dimensioned drawing

D-SUB contact insert

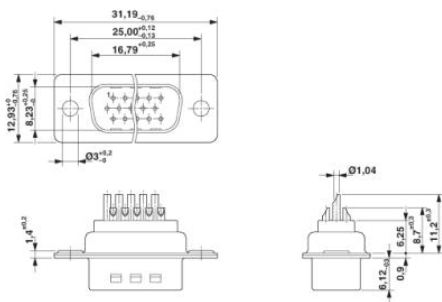

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;